


## Flexible Two-Way Design for Optimum Debris Clearance

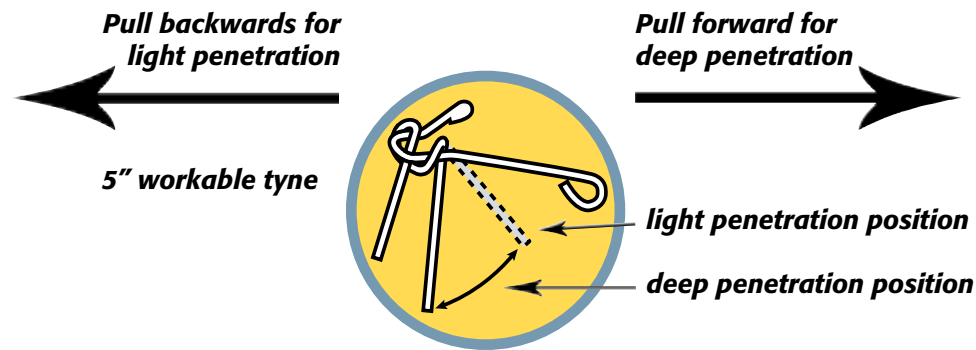

## Flexible Harrow...

**Residue Management.** Heavy residue is quickly surfaced without clogging or bunching even in the most extreme no-till or ridge-till applications.

**Hay or Pasture Land Management.** Studies prove that mechanically stimulating hay, pasture or forage land is the most cost-effective method of dramatically improving the hardiness and productivity of the plant. Scratching the surface covers open seed, assisting in germination and the establishment of new plants. Thus stimulating and spreading the dead thatch, assists in decomposition. This increases the speed at which nutrients are released into the area. Solid or liquid manure makes the surrounding grass unpalatable for livestock. Treatment with the Delta™ Flexible Harrow maximizes the fertilizer benefits of existing droppings by encouraging decomposition, spreading nutrients, incorporating moisture, uncovering growth and aerating soil. Additionally, rodent mounds are effectively leveled.

**Soil Preparation.** In combination with field cultivators, the Delta™ Flexible Harrow prepares a firm, level seed-bed or follows to pack and cover. Used alone it breaks up crust, ridges or stalks for minimum or no-till operations.

**Chemical / Moisture Incorporation.** The various sizes of the Delta™ Flexible Harrow make it ideal for mounting behind your disc, field cultivator or applicator for one-pass applications. Low, wet areas dry more quickly when aerated by the Delta™ Flexible Harrow.

**Surface Smoothing.** Arenas or playing fields become smooth and loosely packed, a safe surface for all activities. Set the tynes to fill holes and level, or to loosen soil and aid drying. Gravel roads or dirt paths are quickly maintained, dried and raked.

**Turf Maintenance.** Unmanaged turf becomes heavily thatched, preventing healthy growth from reaching its full potential. The Delta™ Flexible Harrow stimulates growth by surfacing the dead material, aerating the soil, and strengthening the grasses.

## Tyne Positions for every application



**Heavy Action:** tynes stand at an aggressive 75° angle.



**Medium Action:** Reversed, tynes have a lighter angle of action.



**Light Action:** Turn over, resulting in a finer leveling effect.



**Dual Action:** Front section heavy action, rear section levels.



# DELTA™ by Rem

## Flexible Harrows

Made In The USA



**Harrow Carts** For seed-bed preparation, incorporation, pasture renovation, residue management, and de-thatching.

Delta™ Harrow Carts are built to last! They are available in sizes from 16' to 42' widths. Delta™ Carts are shipped complete with hydraulic cylinder and hoses, tires, safety chain and park stand. A hydraulic wing forward fold option is available. Delta™ Flexible Harrow sections available in 7/16", 1/2" or 5/8" Tynes.

Many farmers have found that the Delta™ Harrow by Rem can save them from having to make a second pass. They are able to hook the Delta™ Harrow behind their double disc, and get the job done with one pass, saving them both time and fuel.

### Delta™ Harrow Cart Features

| Cart Widths | Weight (lbs.) | HP Req. |
|-------------|---------------|---------|
| 16'         | 1800          | 40      |
| 20'         | 1900          | 50      |
| 24'         | 2000          | 60      |
| 28'         | 2100          | 70      |
| 32'         | 2500          | 80      |
| 36'         | 3000          | 90      |
| 42'         | 4900          | 100     |

Hydraulic Fold Option Available.



# DELTA™ Harrow Products

Another dependable innovation by **Rem**

**NEW 5/8" Double Tyne!**



| Delta™ Flexible Harrow Section Features             |             |            |            |
|---|-------------|------------|------------|
| Standard Harrow Sections & Turnlock Harrow Sections |             |            |            |
| Tyne wire diameters available                       | Delta 7/16" | Delta 1/2" | Delta 5/8" |
| Sample width x length (feet)                        | 4 x 8       | 4 x 8      | 4 x 8      |
| Total weight (lbs.)                                 | 118         | 133        | 173        |
| Points per section                                  | 108         | 108        | 108        |
| Number per pallet                                   | 15          | 15         | 15         |
| Horse power requirement                             | 6           | 6          | 6          |
| Pallet size (lbs.)                                  | 4 x 4       | 4 x 4      | 4 x 4      |

| Standard Drawbar Features |               |
|---------------------------|---------------|
| Drawbar widths            | Weight (lbs.) |
| 4'                        | 22            |
| 6'                        | 32            |
| 8'                        | 43            |
| 10'                       | 54            |
| 12'                       | 64            |
| 14'                       | 75            |

| Turnlock Drawbar Features |               |
|---------------------------|---------------|
| Drawbar widths            | Weight (lbs.) |
| 4'                        | 18            |
| 6'                        | 27            |
| 8'                        | 36            |
| 10'                       | 45            |
| 12'                       | 54            |
| 14'                       | 63            |




**3 Point Hitch Attachment** For turf or lawn, arenas, farms, and ranches.

These handy attachments are available in widths from 4'-14'. They feature lift bands, plated chain segments, and all necessary hardware. Each is shipped unassembled.

Flexible Harrow Sections Available in 7/16", 1/2" or 5/8" Tynes.

| 3 Point Attachment Features |                     |               |                        |
|-----------------------------|---------------------|---------------|------------------------|
| 3 Point Widths              | Total Weight (lbs.) | Harrow Length | Horsepower Requirement |
| 4'                          | 113                 | 8'            | 6                      |
| 6'                          | 128                 | 8'            | 9                      |
| 8'                          | 140                 | 8'            | 12                     |
| 10'                         | 159                 | 8'            | 15                     |
| 12'                         | 192                 | 8'            | 18                     |
| 14'                         | 205                 | 8'            | 21                     |

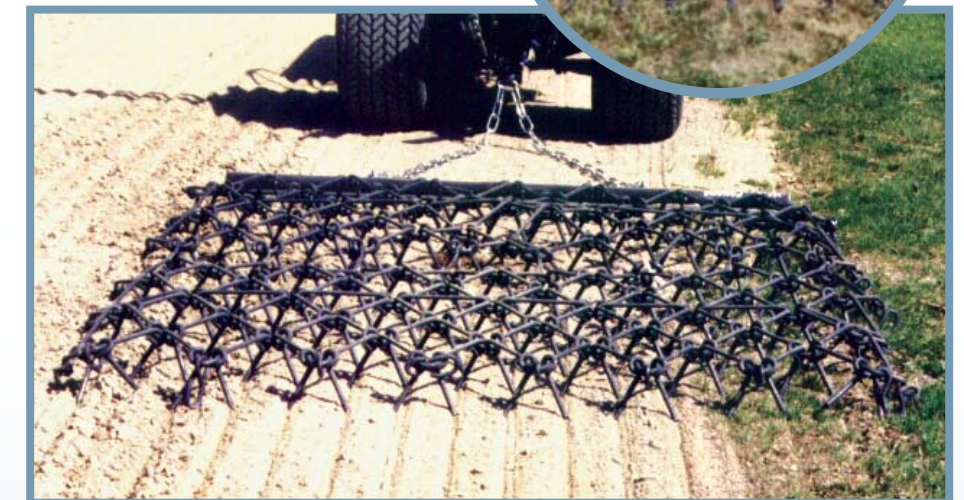

**Drawbars** For lawns, driveways, arenas and sports fields.

From 4' to 14' widths, the drawbar is the most economical choice. Delta™ drawbars are built using heavy duty steel which makes them ideal for extreme tillage conditions.

Flexible Harrow Sections Available in 7/16", 1/2" or 5/8" Tynes.

**Rugged Reliable... Rem**

**Rem Enterprises Inc.**  
800 South Fremont Street  
Shenandoah, IA 51601  
www.rementerprisesinc.com

Toll Free 1.877.874.3020  
Phone 712.246.3020  
Fax 712.246.3022  
deltasales@rem.sk.ca

Rem Technology Patent Protected

